

## SELF PRIMING CONTRACTOR PUMPS

### ELECTRIC DRIVEN S/STEEL & BRONZE SELF PRIMING PUMPS

**B**



Self priming electric pumps in stainless steel or bronze. A non-return valve is fitted on the inlet of the pump body to avoid the loss of water after the pump has stopped, making it easier to prime when the pump starts again. Maximum suction depth of 6 metres and a maximum liquid temperature of 60°C. Stainless steel model suitable for pumping acidic waters, transferring dilute acid, fruit juice or fluid food stuff. Pump casing, inlet flange and impeller and shaft are made from stainless steel. Silicon carbide seal. Bronze model suitable for pumping sea water and the circulation of swimming pools. Pump casing, inlet flange and impeller are made from bronze. Stainless steel shaft, carbon mechanical seal.

#### Features

Centrifugal  
Self Priming  
S/Steel or Bronze Pump

#### Applications

S/Steel for Acidic Water  
Bronze for Sea Water

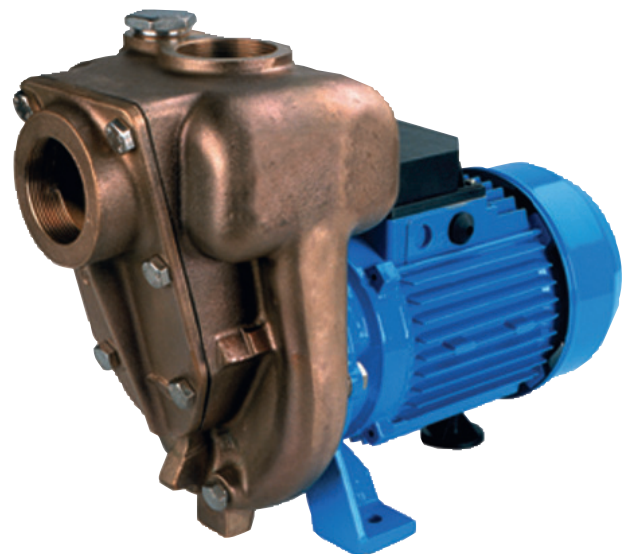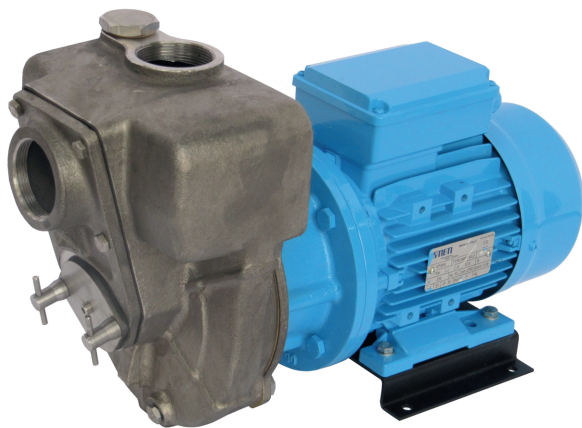

MODEL	VOLTAGE	INLET/ OUTLET	LM/HM	Kw	AMP	SOLIDS	H x W x L mm	Kg	CODE	PRICE
B2KQA-A/X M EA7G* S/STEEL	230v	2" x 2"	440/18	1.5	9	16mm	300 x 185 x 410	24	070-EA7G	
B2KQA-A/X T EA7E* S/STEEL	400v	2" x 2"	440/18	1.5	4	16mm	300 x 185 x 410	24	070-EA7E	
G3TMK-A/X T EALT* S/STEEL	400v	3" x 3"	850/35	4	7.8	8mm	400 x 280 x 635	83	070-EALT	
B3XR-A/X T EALR* S/STEEL	400v	3" x 3"	1400/26	5.5	11	24mm	405 x 280 x 650	96	070-EALR	
B3XR-A/X T EALS* S/STEEL	400v	3" x 3"	1450/30	7.5	14.3	24mm	405 x 280 x 650	98.5	070-EALS	
B2KQ-A/B M EAS8 BRONZE	230v	2" x 2"	450/18	1.5	9	16mm	300 x 185 x 410	26.5	070-020	
B3KQ-A/B M EAT1 BRONZE	230v	3" x 3"	900/16	2.2	13	27mm	300 x 185 x 410	33	070-022	
B2KQ-A/B T EAS9 BRONZE	400v	2" x 2"	450/18	1.5	4	16mm	300 x 185 x 410	26.5	070-024	
B3KQ-A/B T EAT2* BRONZE	400v	3" x 3"	900/16	2.2	5	27mm	300 x 185 x 445	33	070-026	
B4KQ-A/B T EALE* BRONZE	400v	4" x 4"	1650/15	4	7.8	35mm	405 x 315 x 670	87	070-EALE	

\*Available upon request.

# SELF PRIMING CONTRACTOR PUMPS

## ELECTRIC DRIVEN S/STEEL & BRONZE SELF PRIMING PUMPS

