

# SUBMERSIBLE PUMPS

## JST KZN INDUSTRIAL HEAVY DUTY PUMPS

**A**


Top outlet providing maximum motor cooling for continuous operation. Built in agitator, specially designed to create a mixing action at the pump inlet causing the solids to move in suspension and to help keep the impeller and flow chamber clear and unclogged. Heavy duty Hi Chromium impeller, diffuser plate and agitator. Male BSP threaded outlets, direct online starting and 20 metres of power cable. 1500 RPM motors. Maximum liquid temperature 40°C.

### Features

- Cast Iron Pump Body
- HICR Impeller
- Max Solids JST37KZN 20mm /  
JST55&75KZN 25mm  
JST110 220KZN 35mm

### Applications

- Heavy Duty
- Sewage
- Dirty Water
- De watering
- Sand/Sludge/Slurry

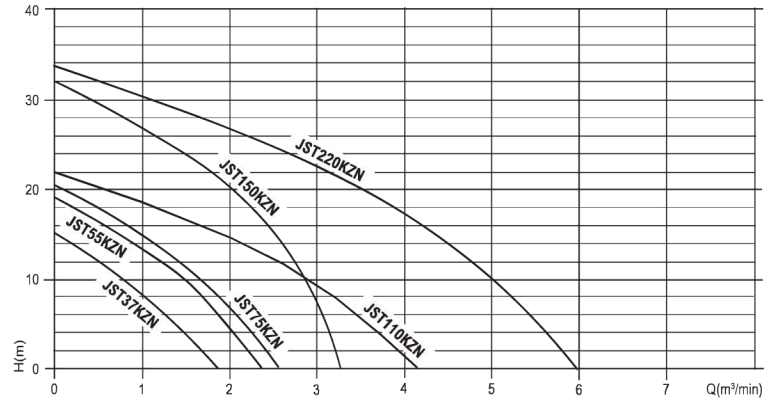

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE	PRICE
JST-37 KZN	400v	3"	1730/15.5	3.7	7.9	820 x 410 x 420	135	011-091	
JST-55 KZN	400v	4"	2430/19	5.5	11.5	820 x 410 x 420	145	011-093	
JST-75 KZN	400v	4"	2570/20.5	7.5	15.2	840 x 410 x 420	165	011-095	
JST-110 KZN	400v	6"	4135/22	11	22.7	1100 x 560 x 570	275	011-097	
JST-150 KZN	400v	6"	3305/32	15	29.9	1100 x 560 x 570	285	011-114	
JST-220 KZN	400v	6"	5960/33.5	22	36.5	1493 x 560 x 578	470	011-116	