

# SUBMERSIBLE PUMPS

## JS RST

**A**

Top outlet, twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Stainless steel outer case, shaft and motor case. Cast iron lower motor bearing/seal housing, motor top cover and volute. Complete with 10 metres of power cable. Hose tails are supplied only with models RST6, 8 and 15. Suitable for water features, drainage applications, clean and dirty water. H Versions have higher head capabilities.

### Features

- Cast Iron Pump Body
- Cast Iron Impeller
- Max Solids RST6-15 6mm  
RST22/H-75H 10mm

### Applications



- Heavy Duty
- Clean Water
- Dirty Water
- Drainage



RST22



RST-6

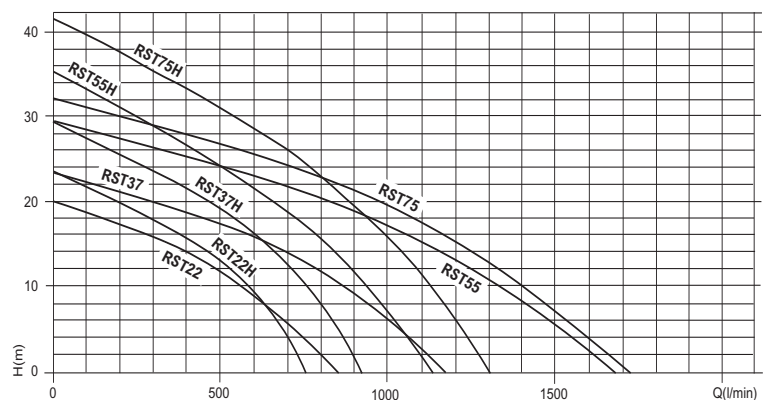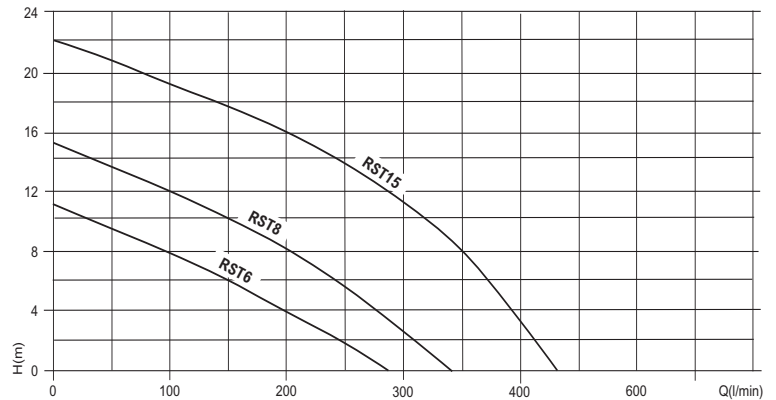

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE	PRICE
RST-6	400v	2"	280/11	0.55	1.5	420 x 190 x 190	20	012-006	
RST-8	400v	2"	345/18	0.75	1.8	420 x 190 x 190	22	012-008	
RST-15	400v	2"	435/22	1.5	3.2	500 x 180 x 180	29	012-015	
RST-22	400v	3"	850/20	2.2	4.6	530 x 250 x 250	52	012-022	
RST-37	400v	4"	1170/23	3.7	7.9	535 x 250 x 250	56	012-037	
RST-55	400v	4"	1670/29	5.5	11.5	640 x 250 x 250	90	012-055	
RST-75	400v	4"	1720/32	7.5	15.2	640 x 250 x 250	95	012-075	
RST-22H	400v	3"	765/23	2.2	4.6	530 x 250 x 250	52	012-024	
RST-37H	400v	3"	920/29	3.7	7.9	535 x 250 x 250	56	012-039	
RST-55H	400v	3"	1155/35	5.5	11.5	640 x 250 x 250	90	012-059	
RST-75H	400v	4"	1310/41.5	7.5	15.2	640 x 250 x 250	95	012-077	