



Top outlet providing maximum motor cooling for continuous operation. Built in agitator, specially designed to create a mixing action at the pump inlet causing the solids to move in suspension and to help keep the impeller and flow chamber clear and unclogged. Heavy duty Hi Chromium impeller, diffuser plate and agitator. Male BSP threaded outlets, direct online starting and 20 metres of power cable. 3000 RPM motors. Maximum liquid temperature 40°C.

Features

- Cast Iron Pump Body
- HICR Impeller
- Max Solids 10mm

Applications

- Heavy Duty
- Sewage
- Dirty Water
- De watering
- Sand/Sludge/Slurry

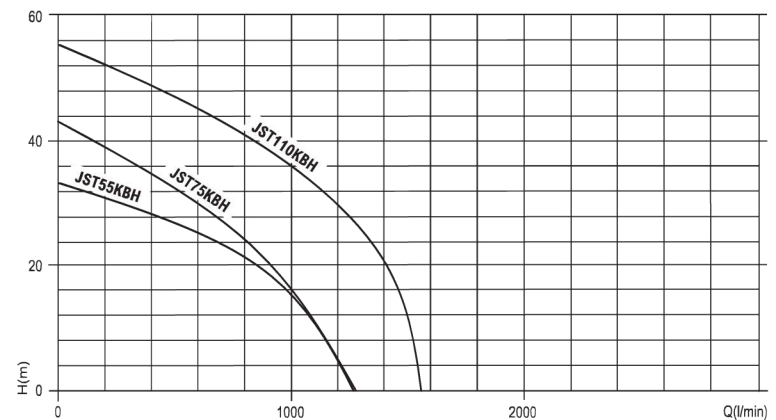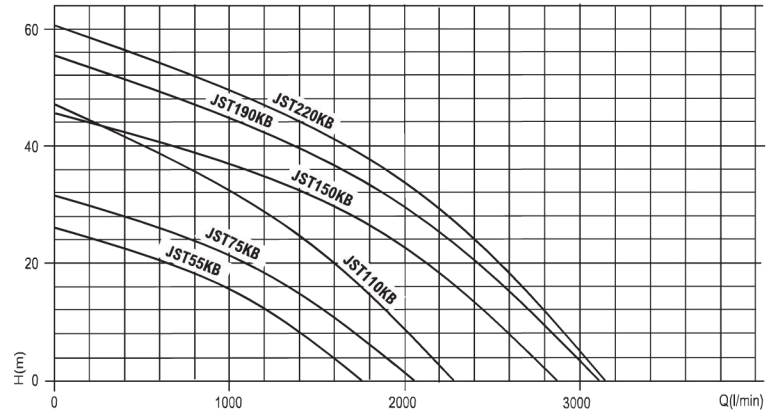

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE	PRICE
JST-55 KB	400v	4"	1755/26	5.5	11.5	750 x 345 x 350	120	011-122	
JST-55 KBH	400v	3"	1260/33	5.5	11.5	720 x 345 x 350	120	011-124	
JST-75 KB	400v	6"	2055/31.5	7.5	15.2	825 x 345 x 370	130	011-126	
JST-75 KBH	400v	4"	1265/43	7.5	15.2	795 x 345 x 370	130	011-128	
JST-110 KB	400v	6"	2280/47	11	22.7	890 x 345 x 370	150	011-130	
JST-110 KBH	400v	4"	1545/55	11	22.7	860 x 345 x 370	150	011-132	
JST-150 KB	400v	6"	2870/45.5	15	29.9	1002 x 365 x 540	250	011-134	
JST-190 KB	400v	6"	3110/55.5	19	36.5	1002 x 365 x 540	255	011-136	
JST-220 KB	400v	6"	3145/60.5	22	45.5	1002 x 365 x 540	260	011-138	