


The submersible pumps for waste water **VIP VORT FLOTEC** are an essential requirement when it is necessary to transfer water containing particles with a maximum diameter of 25 mm. Therefore, they are particularly suitable to drain cesspools, flooded rooms and excavated pits in yards.

Flotec®




VIP VORT

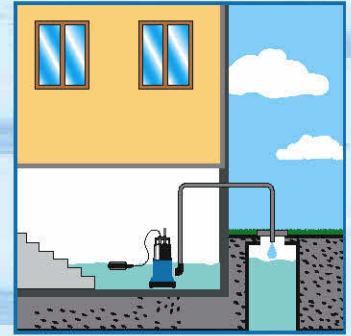

Typical features

- Asynchronous single-phase electric motor with built-in thermal relay
- STAINLESS steel motor shaft
- IP 68 Protection Class for the electric parts
- Vortex self-cleaning hydraulic system with rear impeller
- All models come with a 10 m power cable H05 RN-F .
- Reinforcing elements in ceramic fitted on the drive motor to allow the pump to be used in continuous mode.
- Immerse at a minimum depth of 7 m.
- Max. temperature of the fluid: 40° C
- Colour lithographed package

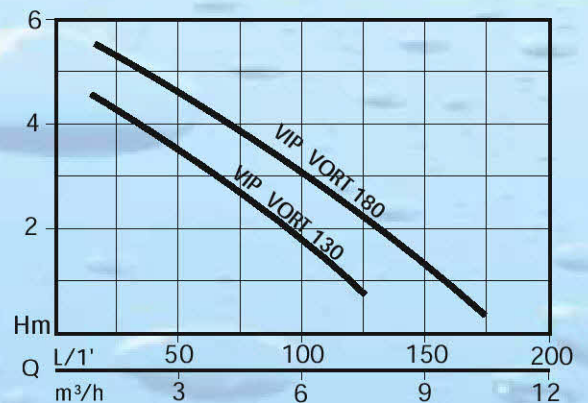

MODEL	VIP VORT 130 / 5 AUTO	VIP VORT 180 / 6 AUTO
Article	N2101080	N2101090
Bar Code	8010583126075 €	8010583126082 €
Absorbed power	370 W	480 W
Max. Head / Pressure	5 m / 0,5 bar	6 m / 0,6 bar
Max. Flow rate	7800 l/h	10800 l/h
Pump body	Polypropylene	Polypropylene
Impeller	Plastic Noryl	Plastic Noryl
Minimum draining level	30 mm (manual)	30 mm (manual)
Max. size of impurities	25 mm	25 mm
Pump outlet	Ø 1" 1/4 M	Ø 1" 1/4 M
Accessories supplied	Adjustable connector for hoses ø 25 and 32mm	Adjustable connector for hoses ø 25 and 32mm