

SELF PRIMING CONTRACTOR PUMPS

CAST IRON SELF PRIMING PUMPS HIGH HEAD

B



Self-priming pump with open impeller suitable for pumping clean or slightly dirty water with no abrasives. A non-return valve is fitted on the inlet of the pump to avoid the loss of water after the pump has stopped, making it easier to prime when the pump starts again. Maximum suction depth of 6 metres and a maximum liquid temperature of 70°C. Stainless steel shaft, carbon mechanical seal. Models 4Kw and above come assembled on a skid plate.

Features

Centrifugal
Self Priming
High Head

Applications

Clean Water
Dirty Water

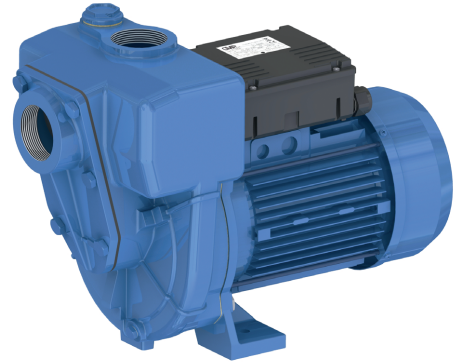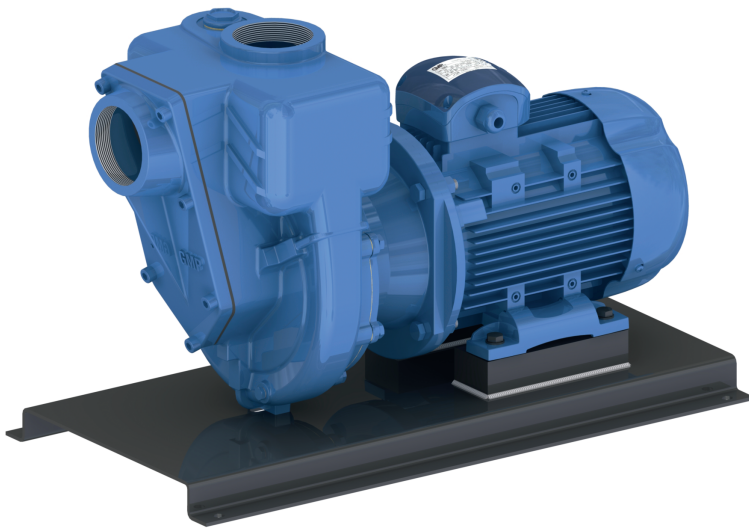

MODEL	VOLTAGE	INLET/ OUTLET	LM/HM	Kw	AMP	SOLIDS	H x W x L mm	Kg	CODE	PRICE
G2TMK-A EAEN	230v	2" x 2"	315/25	1.5	10.5	5mm	300 x 185 x 410	35	070-EAEN	
G2TMK-A EB53	400v	2" x 2"	315/25	1.5	4	5mm	300 x 185 x 410	35	070-EB53	
G2TMK-A EAEL	230v	2" x 2"	370/33	2.2	13	6mm	316 x 230 x 450	37	070-EAEL	
G2TMK-A EADT	400v	2" x 2"	370/33	2.2	6	6mm	316 x 230 x 450	37	070-EADT	
G2TMK-A EAT8	400v	2" x 2"	400/33	3	7	8mm	285 x 220 x 375	37	070-EAT8	
G3TMK-A EAMV*	400/690v	3" x 3"	850/35	4	7.8	8mm	450 x 360 x 700	83	070-EAMV	
G3TMK-A EADH*	400/690v	3" x 3"	900/38	5.5	10.5	10mm	470 x 360 x 800	99	070-EADH	
G3TMK-A EAHD*	400/690v	3" x 3"	900/44	7.5	14.1	13mm	470 x 360 x 800	105	070-EAHD	
G3TMK-A EANB*	400/690v	3" x 3"	1060/48	9.2	17.2	14mm	470 x 360 x 800	113	070-EANB	
G3TMK-A EAFL*	400/690v	3" x 3"	1060/52	11	19.5	16mm	506 x 470 x 1000	202	070-EAFL	
B3ZPM-A EAMS*	400/690v	3" x 3"	1200/60	15	28.8	13mm	530 x 470 x 1000	210	070-EAMS	
B3ZPM-A EAHO*	400/690v	3" x 3"	1250/65	18.5	33	14mm	530 x 470 x 1000	247	070-EAHO	
B3ZPM-A EAH1*	400/690v	3" x 3"	1250/75	22	38.8	19mm	530 x 470 x 1000	275	070-EAH1	

*Available upon request.

SELF PRIMING CONTRACTOR PUMPS

CAST IRON SELF PRIMING PUMPS HIGH HEAD

