

## SELF PRIMING CONTRACTOR PUMPS

### FUEL OIL 'RED' HIGH VOLUME DIESEL TRANSFER

**B**


Self priming electric pump with open impeller to transfer fuels. Suitable for pumping diesel, gas oil, paraffin. NOT FOR PUMPING PETROL. A non-return valve is fitted on the inlet of the pump body to avoid the loss of liquid after the pump has stopped, making it easier to prime when the pump starts again. Maximum suction depth of 6 metres and a maximum liquid temperature of 60°C. Pump casing, inlet flange and impeller are made from cast iron. Stainless steel shaft. Viton mechanical seal and Viton check valve.

#### Features

Centrifugal  
Self Priming

#### Applications

Diesel Transfer

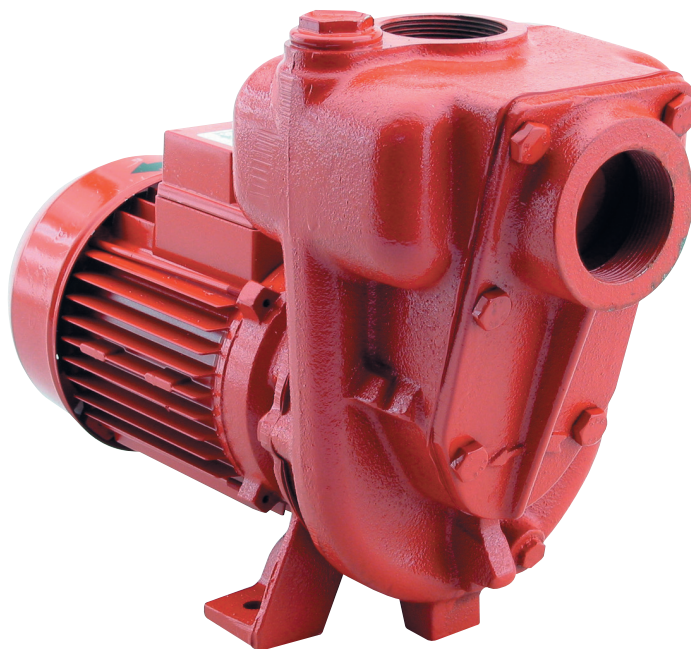

MODEL	VOLTAGE	INLET/ OUTLET	LM/HM	Kw	AMP	SOLIDS mm	H x W x L mm	Kg	CODE	PRICE
B1KQ-A RED EA2L	230v	1" x 1"	140/12	0.55	4.1	7	285 x 216 x 375	15	070-168	
B1½KQ-A RED 3516	230v	1½" x 1½"	290/16	0.75	6.2	8	300 x 180 x 375	20	070-3516	
B2KQ-A RED EA2V	230v	2" x 2"	450/18	1.5	9	12	300 x 185 x 410	21	070-166	
B2KQ-A RED EB49	110v	2" x 2"	390/16	1.5	19	14	300 x 185 x 410	25	070-159	
B3KQ-A RED EA9C	230v	3" x 3"	850/15	2.2	13	27	300 x 185 x 445	30	070-EA9C	
B1KQ-A RED EA2M	400v	1" x 1"	140/12	0.55	1.8	7	285 x 216 x 375	15	070-169	
B1½KQ-A RED 3501	400v	1½" x 1½"	290/16	0.75	1.9	8	300 x 180 x 375	20	070-163	
B2KQ-A RED EA1S	400v	2" x 2"	450/18	1.5	2.6	12	300 x 185 x 410	21	070-167	
B3KQ-A RED EAM7	400v	3" x 3"	850/15	2.2	5	27	300 x 185 x 445	30	070-165	
B3XR-A RED EANS	400v	3" x 3"	1200/26	4	7.8	35	400 x 280 x 635	74	070-EANS	

# SELF PRIMING CONTRACTOR PUMPS

## FUEL OIL 'RED' HIGH VOLUME DIESEL TRANSFER

