



# N double pole probe

BIPOLAR POLE PROBE, STAINLESS STEEL ELECTRODES, TO BE CONNECTED TO AN ELECTRONIC LEVEL RELAY OR ELECTRONIC PANEL WITH INPUTS FOR CONDUCTIVE PROBES.


MAX 12V AC ELECTRODE VOLTAGE BY MEANS OF DOUBLE INSULATION TRANSFORMER

POLYPROPYLEN CASE - PVC cable 2 WIRES

its wiring must be kept separate from the wiring of the circuits with dangerous voltage.



\* AVAILABLE ON REQUEST  
TRIPOLAR PROBE n° 3 STAINLESS ELECTRODES  
PVC CABLE 3 WIRES

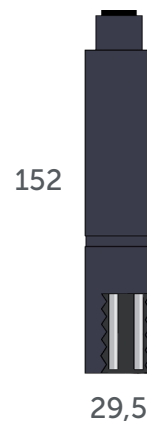

CODE  
H A P

Cable lenght  
5 metri = 05 - meters cable lenght  
10 metri = 10 - meters cable lenght

RATED VOLTAGE	IP	WATER TEMPERATURE	MAX PRESSURE
MAX 12V c.a.	68	55°C	10 BAR