


PRESSURE BOOSTING SYSTEMS

SINGLE PUMP BOOSTERSE

Self priming single pump booster sets complete with pressure switch and mild steel accumulator vessel. Water supply is not always enough to supply the correct amount of water at a suitable pressure, so the best and most affordable solution to solve water deficiency problems is to install a pumped booster system via a ‘break’ tank. These systems are specifically designed to boost the pressure of the water supply and deliver the correct amount of water to all outlets. The pre-set pressure switch enables it to automatically start and stop the pump. Do not allow to run dry.

- Features
- High Pressure
- Automatic
- Applications
- Water Boosting
- Washing Systems

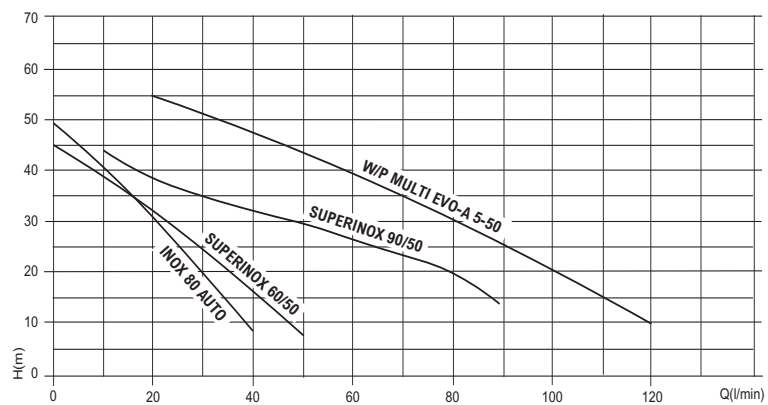

SUPERINOX 60/50



INOX 80 AUTO

MODEL	VOLT	TANK SIZE	INLET/OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE	PRICE
SUPERINOX 60/50	230v	25L	1" x 1"	55/45	0.55	4	550 x 280 x 530	11	022-462	
SUPERINOX 90/50	230v	25L	1¼" x 1"	80/45	0.90	7	580 x 280 x 530	12	022-464	
W/P MULTI EVO-A 5-50M	230v	25L	1" x 1"	100/55	0.95	6.2	550 x 260 x 520	13	022-495	
W/P MULTI EVO-A 5-50M+	230v	60L	1" x 1"	100/55	0.95	6.2	640 x 370 x 640	23	022-500	
INOX 80 AUTO	110v	25L	1" x 1"	40/45	0.59	9	580 x 280 x 530	12	022-302	